




STAIRTEC FSF stair nosing profiles resolve challenges in transitioning from tile flooring to tile stairs. This product range proposes practical, efficient, and durable solutions.

stairtec FSF

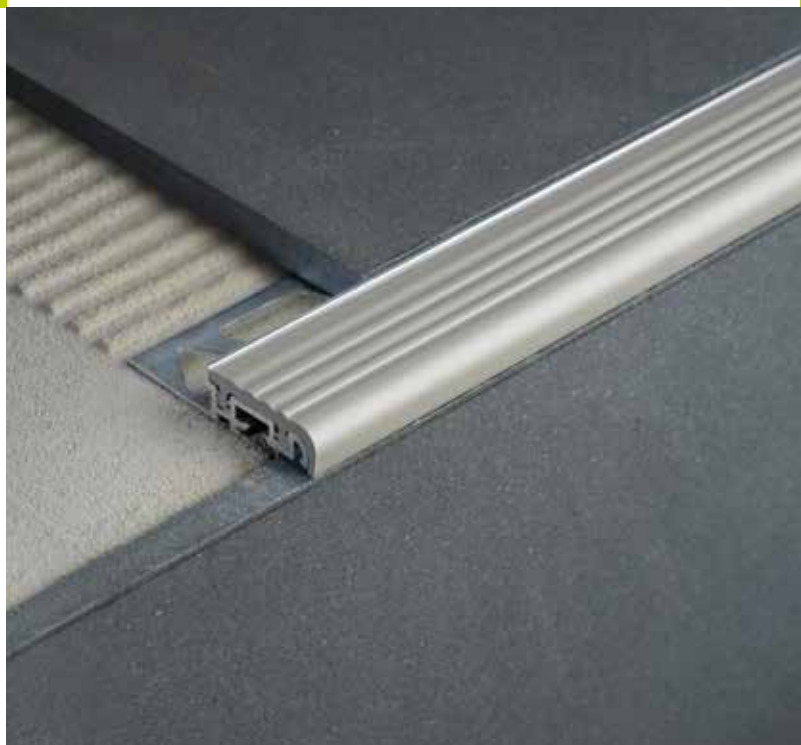

This is the section for H 5/16" and 3/8" (8 and 10mm).
For H 1/2" (12.5mm) the section is different



STAIRTEC FSF-A* Aluminum with 1-3/16" (30mm) Thermoplastic Rubber Insert
Aluminum base profile with a replaceable no-slip thermoplastic rubber insert. End caps FST are available for all three profile heights. Replacement no-slip thermoplastic rubber insert: Code FSFI 30 P*.

PLEASE NOTE: thermoplastic rubber insert could be affected by some amount of shrinkage depending on temperature and its variances ((0,2% every 10°C / 50F). The profiles is sold with rubber length exceeding profile length to compensate dimensional changes (the exceeding material can be used also after installation).

	H = in	mm	Art.		Insert Colors	
Material: Extruded Natural Aluminum	5/16	8	FSF	80	A*	23/32/51
	3/8	10	FSF	100	A*	23/32/51
Synthetic Insert	1/2	12.5	FSF	125	A*	23/32/51
Length: 8'10" (2.70meters)						
Width: 1-3/16" (30mm)						
Colors*: Grey (23), Beige (32), Black (51)						

Material: PVC	5/16	8	FST	80	P*	23/32/51
	3/8	10	FST	100	P*	23/32/51
	1/2	12.5	FST	125	P*	23/32/51

